

Product Environmental Aspects Declaration



EP and IJ printer (PCR number: AD-04)

No. AD-11-158
Date of publication
Sep./6/2011

brother
at your side

<http://www.brother.co.jp/>

For inquiry:
Environmental Product Group
Environmental Management Dept.
Brother Industries, Ltd.
Tel: +81-52-824-2406
FAX: +81-52-824-5667

Black & White Laser Printer HL-2130


Specifications:

- Electrophotographic Printer (EP)
- Black & White
- Printing Speed: 20ppm
- Maximum Printing Size: A4

The following data is calculated by assuming the product prints 240,000 sheets in 5-year usage period.

< Main environmental impact in the product lifecycle >

- Energy consumption 19,000MJ
- Global warming impact (CO₂ equivalent) 1,185.0kg
- Acidification impact (SO₂ equivalent) 1.76kg

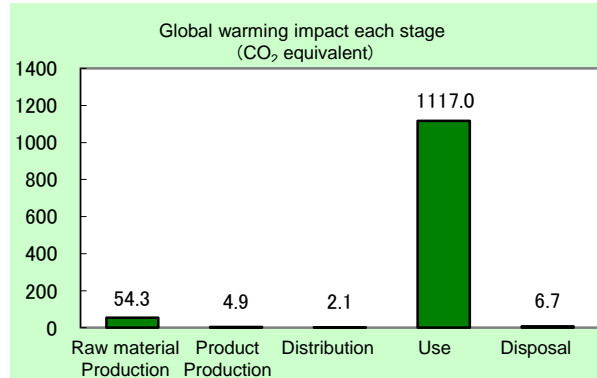

- Electric power consumption in 5 years of "Use stage" is 216kWh.
- The above data does not include the environmental impact of the paper that is used for printing.

Notes:

1. Original LCA data is available on PEIDS: Product Environmental Information Declaration Sheet, and Product Data Sheet.
2. Unified rules and requirements for EcoLeaf LCA, for intended product category, are available as a PCR:Product Category Rule. Visit EcoLeaf website under JEMAI homepage at http://www.jemai.or.jp/ecoleaf_e/ for details.
3. The units used for EcoLeaf calculations are based on Japanese domestic data. Overseas data has not been applied.

[Supplemental environmental information]

The product assembly and main parts of toner and photoreceptor are produced at plants certified with ISO 14001.

The product conforms to the International Energy Star Program.

The product has obtained the ECO Mark certification (3R & Energy-Saving Design).

PCR review was conducted by: PCR Deliberation Committee, January 01, 2008, Name of representative: Yohji Uchiyama, University of Tsukuba, Graduate School
Independent verification of the label and data, according to ISO 14025 internal external Third party verifier *: System auditor, Shozo Nakamuta
Program operator: Japan Environmental Management Association for Industry Email: ecoleaf@jemai.or.jp

* In the case of a business entity certified as an Ecoleaf-data-collection system, the names of certification auditors are written.

Product Environmental Information Data Sheet (PEIDS)



Document control no.	F-02As-02
Product vendor	Brother Industries,LTD.
EcoLeaf registration no.	AD-11-158

Unit Function DB version	v2.1
Characterization Factor DB version	v2.1

PCR name	EP and IJ printer		Product type	HL-2130			
PCR code	AD-04	Product weight (kg)	6.62	Package (kg)	1.40	Weight total (kg)	8.03

In/Out items	Life Cycle Stage	Unit	Production		Distribution	Use	Disposal	Total		
			Raw material	Product						
Energy Consumption										
Inventory analyses	Impact by Resource Consumption	Energy resources	MJ	1.02E+03	8.91E+01	2.82E+01	1.79E+04	7.47E+00	1.90E+04	
			Mcal	2.43E+02	2.13E+01	6.73E+00	4.27E+03	1.78E+00	4.54E+03	
			kg	5.22E+00	5.64E-01	6.58E-05	9.41E+01	4.50E-02	1.00E+02	
			kg	1.06E+01	7.26E-01	6.16E-01	1.78E+02	7.97E-02	1.89E+02	
			kg	2.19E+00	2.98E-01	9.51E-03	3.28E+01	2.31E-02	3.54E+01	
		Exhaustible resources	Mineral resources	kg	2.22E-04	3.81E-05	4.46E-09	3.29E-03	3.04E-06	3.55E-03
				kg	3.83E+00	1.17E-02	0	6.67E+01	0	7.06E+01
				kg	1.94E+00	0	0	5.22E+01	0	5.41E+01
				kg	1.33E-01	0	0	5.40E-03	0	1.39E-01
				kg	1.76E-01	0	0	8.87E-01	0	1.06E+00
				kg	6.79E-03	0	0	1.46E-01	0	1.53E-01
				kg	9.77E-03	0	0	2.16E-01	0	2.25E-01
				kg	9.95E-03	0	0	3.00E-01	0	3.10E-01
				kg	6.90E-03	0	0	4.39E-04	0	7.34E-03
			Renewable resources	kg	-	-	-	-	-	-
	kg			6.80E-02	0	0	4.31E-03	0	7.23E-02	
	kg			-	-	-	-	-	-	
	kg			-	-	-	-	-	-	
	kg			1.85E-01	0	0	6.14E-01	0	8.00E-01	
	kg			2.40E+00	1.10E-04	0	3.77E+01	2.41E-03	4.01E+01	
	kg			5.48E-01	7.12E-03	0	1.30E+01	6.22E-02	1.37E+01	
	kg			1.59E-02	0	0	0	0	1.59E-02	
	kg			2.36E+00	2.09E-01	0	2.24E+02	0	2.26E+02	
	Impact by Emission/Discharge to the environment	to Atmosphere	kg	5.54E+03	4.40E+02	4.98E-02	5.81E+04	3.81E+01	6.42E+04	
			kg	5.30E+01	4.86E+00	2.00E+00	1.10E+03	6.71E+00	1.17E+03	
			kg	3.72E-02	3.48E-03	1.16E-03	5.99E-01	3.52E-03	6.44E-01	
			kg	6.92E-02	3.53E-03	8.43E-03	1.51E+00	7.52E-03	1.60E+00	
			kg	4.87E-03	1.40E-04	3.51E-04	6.01E-02	9.89E-06	6.55E-02	
			kg	5.90E-04	1.02E-04	1.19E-08	8.79E-03	8.14E-06	9.49E-03	
			kg	7.23E-03	7.49E-04	1.99E-03	2.14E-01	1.38E-03	2.25E-01	
			kg	1.15E-03	2.00E-04	2.34E-08	1.72E-02	1.59E-05	1.86E-02	
			kg	2.26E-03	3.75E-05	2.69E-04	3.29E-02	2.61E-05	3.55E-02	
			kg	7.11E-03	1.66E-04	8.31E-04	1.14E-01	4.28E-04	1.23E-01	
to Water domain		kg	-	-	-	-	-	-		
		kg	-	-	-	-	-	-		
		kg	-	-	-	-	-	-		
		kg	-	-	-	-	-	-		
		kg	-	-	-	-	-	-		
to Soil system	kg	4.50E-01	3.00E-03	0	8.82E+01	3.01E+00	9.17E+01			
	kg	7.35E-01	0	0	1.59E+01	0	1.66E+01			
	kg	3.31E-01	0	0	1.90E+00	0	2.23E+00			
	kg	1.55E-04	2.66E-05	3.12E-09	2.30E-03	2.12E-06	2.48E-03			
	kg	-	-	-	-	-	-			
Impact assessment	by Resource Consumption	Exhaustible resources	kg	1.84E+01	1.76E+00	6.27E-01	3.04E+02	1.61E-01	3.25E+02	
			kg	4.10E+01	6.42E-03	0	2.15E+02	0	2.56E+02	
	Impact by Emission/Discharge to the environment	to Atmosphere	kg	5.43E+01	4.90E+00	2.10E+00	1.12E+03	6.71E+00	1.19E+03	
			kg	8.57E-02	5.95E-03	7.05E-03	1.66E+00	8.78E-03	1.76E+00	

[Notes for readers: EcoLeaf common rules]

I. Stage related

A. "Production" stage is intended for two sub-stages listed below.

- "Raw material" production: consists of mining, transportation and raw material production.
- "Product" production: consists of the parts processing, assembly and installation.

B. "Distribution" stage is intended for transportation of produced product. Transportation of consumables and maintenance goods (e.g., replacement parts) for use of the product are included into "Use" stage.

C. "Use" stage is intended for use of the product (active mode, standby mode, etc.) and production, transportation to disposal of consumables/maintenance goods (e.g., replacement parts).

D. "Disposal" stage is intended for environmental impacts by product disposal.

II. Inventory analyses

A. Data of mineral ore on "Exhaustible resources" are presented in weight of pure ingredients (e.g., iron, aluminum) in the ore.

B. Data on energy resources are presented based on origin in calorific value. e.g. Data on uranium ore presents weight of uranium concentrate, which is available for use as an atomic fuel.

C. Data of discharge to water system are in actual figure (not calculated using unit function in inventory analyses).

III. Impact analyses

Result of the "Impact analyses" is found in converting results of inventory analyses into total amount of a reference material (e.g. CO₂ in case of "Global Warming").

A. Impact "by resource consumption" represents magnitude of impacts to resource depletion.

B. Impact "by emission/discharge to environment" represents magnitude of impacts to Atmosphere, Water and Soil system.

IV. Data entry format

A. Exponential notation, after the decimal point to two, should be used.

B. Indicate "0" instead exponential notation, if the result of calculation or estimation is considered as "zero" or negligible in comparison to related results.

C. Indicate "-" if calculation nor estimation can not be done, in order to differentiate to indicate "zero".

D. Row total of the data is automatically calculated, excluding a row includes "-" item. Row total of such is presented as a blank (no data).

(BGD for material production are for production from mineral ore. Those data do not include reclaiming processes like recovery from scrap.)

[Notes for readers: Target product specific]

1. Product weight includes the accessories as standard equipment, a toner cartridge and a drum unit. Packaging weight includes packaging material and appended goods (e.g., user's manual, other printed matter, polyethylene bags).

2. Production stage includes the production/distribution impact of the parts making up a machine and the initial set of a toner cartridge and a photoreceptor, as well as the impact of product assembly.

3. Distribution stage's impact is calculated according to the PCR. The transportation distance of a product from an overseas factory to the port of Japan is based on actual distance.

The transportation distance in Japan uses 100 km as average distance

4. Use stage's impact is calculated according to the PCR. It includes the impact of printing 240,000 sheets, calculated by supposing a user use a machine for 5 years.

It also includes the electricity consumption of a machine calculated based on 5-year use, supposing a month consists of 4 weeks, with weekly electricity consumption calculated by the TEC test procedure.

The production, distribution, and disposal/recycle impact of the consumables used in those 5 years is also included.

The distribution impact of consumables is calculated under the same condition of products:

The transportation distance of consumables from an overseas factory to the port of Japan is based on actual distance. The transportation distance in Japan uses 100 km as average distance.

Since we have not collected consumables as a producer, which are newly introduced, they are assumed to be collected as general waste, crushed and separated as combustible/non-combustible material.

This stage includes the incineration impact of combustible materials and the landfill impact of non-combustible materials of consumables.

5. Disposal stage: Since we have not collected machines as a producer, they are assumed to be collected as general waste, crushed and separated as combustible/non-combustible material.

This stage includes the incineration impact of combustible materials and the landfill impact of non-combustible materials of machines.

Product data sheet

(Input data and parameters for LCA)



Document control no.	F-03s-02
Product vendor	Brother Industries,LTD.
EcoLeaf registration no.	AD-11-158

PCR name	EP and IJ printer(PCR ID:AD-04)	Product type	HL-2130				
LCA/LCIA in units of:	1	Product weight (kg)	6.62	Package (kg)	1.40	Weight total (kg)	8.03

1. Product information (per unit): parts etc. by material and by process/assembly method

Product	Breakdown of primary materials				Math breakdown of parts, which need to apply Processing / Assembly Base Units (Parts B, C)			
	Material name	Weight (kg)	Material name	Weight (kg)	Process name	Weight (kg)	Process name	Weight (kg)
	Steel	1.60E+00	Paper	1.10E+00	Press molding: Iron (kg)	1.64E+00	Parts assembly (kg)	1.68E+00
Stainless steel	4.28E-02	Semiconductor substrate	6.14E-01	Press molding: Nonferrous metal (kg)	1.03E-01			
Aluminum	1.46E-01	Wood	0	Injection molding (kg)	4.25E+00			
Other metal	9.40E-04	Medium-sized motor	2.44E-01	Glass molding (kg)	7.54E-03			
Thermoplastic resin	4.08E+00	Lubricants	6.65E-04					
Thermosetting resin	5.20E-02							
Rubber	1.40E-01							
Glass	7.54E-03							
Subtotal	6.07E+00	Subtotal	1.96E+00					
Total		Subtotal	8.03E+00	Subtotal	6.00E+00	Subtotal	1.68E+00	

Note

2. Production site information (per unit): Consumption and discharge/emission for production/processing/assembly within the site.

SOx and NOx should be indicated in SO₂, NO₂ equivalent.

Consumption	Classification	Material	Energy	Energy	Energy	Energy	Energy	Material	
	Distribution	Corrugated cardboard (kg)	Electricity (kwh)	Diesel truck: 20 ton (kg.km)	Incineration: Industrial waste (kg)	LNG as fuel (kg)	Diesel oil as fuel (kg)	Freight by ship (kg.km)	PP (kg)
Quantity		9.82E-02	3.23E+00	4.00E+01	1.10E-01	1.44E-02	1.68E-02	3.28E+02	1.17E-02
Note									
Consumption	Classification	Energy	Energy	Energy					
	Distribution	LPG(NPG) as fuel (kg)	Diesel truck: 20 ton (kg.km)	Diesel truck: 10 ton (kg.km)					
Quantity		1.37E-02	1.75E+01	1.65E+01					
Note									
Emission/Discharge	Classification								
	Distribution								
Quantity									
Note									

Note

3. Distribution stage information (per unit): means, distance, loading ratio, consumptions and emissions/discharges.

Distribution	Means of transportation	Diesel truck: 20 ton (kg.km)	Diesel truck: 20 ton (kg.km)	Diesel truck: 20 ton (kg.km)	Diesel truck: 20 ton (kg.km)	Freight by ship (kg.km)	Freight by ship (kg.km)	Freight by ship (kg.km)	Freight by ship (kg.km)
	Conditions	Mass (kg)	Distance (km)	Loading Ratio (%)	Load (kg.km)	Mass (kg)	Distance (km)	Loading Ratio (%)	Load (kg.km)
Quantity		8.03E+00	5.00E+01	2.87E+01	1.40E+03	8.03E+00	4.06E+03	1.00E+02	3.28E+04
Note									
Distribution	Means of transportation	Diesel truck: 10 ton (kg.km)	Diesel truck: 10 ton (kg.km)	Diesel truck: 10 ton (kg.km)	Diesel truck: 10 ton (kg.km)				
	Conditions	Mass (kg)	Distance (km)	Loading Ratio (%)	Load (kg.km)				
Quantity		8.03E+00	1.00E+02	2.87E+01	2.79E+03				
Note									

Note

4. Use stage (per unit): use condition (mode, term) including active mode, standby mode and maintenance.

4.1 Product and accessories subject to this analysis

Product	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Diesel truck: 20 ton (kg.km)	Freight by ship (kg.km)	Diesel truck: 10 ton (kg.km)	Diesel truck: 2 ton (kg.km)	Cold-Rolled steel plate (kg)	Electroplated steel Plate (kg)	Stainless steel plate (kg)	Copper plate (kg)
Quantity		5.14E+04	9.54E+05	1.09E+05	1.20E+03	1.64E+00	4.84E+01	9.18E-01	1.79E-02
Note		Distribution of consumables used in 5 years	Distribution of consumables used in 5 years	Distribution of consumables used in 5 years	Distribution of consumables used in 5 years				
Product	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Aluminum plate (kg)	Low density polyethylene (kg)	PP (kg)	PS (kg)	Polycarbonate (kg)	PC-ABS (70/30) (kg)	POM (polyacetal) (kg)	ABS (kg)
Quantity		8.39E-01	4.94E+00	1.98E+00	2.51E+00	8.02E-01	3.59E+01	5.52E+00	5.59E+00
Note									
Product	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	AS resin (kg)	PET (kg)	Expandable soft polyurethane (for automobile) (kg)	Nitrile-butadiene rubber(NBR) (kg)	Corrugated cardboard (kg)	Cardboard (kg)	Paper (Western style) (kg)	Injection molding (kg)
Quantity		7.20E+00	4.90E-01	5.92E-01	1.07E+01	7.89E+01	2.19E+01	2.48E+00	6.85E+01
Note									
Product	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Press molding: Iron (kg)	Press molding: Nonferrous metal (kg)	Assembled circuit board (kg)	Electricity (kWh)	Diesel oil as fuel (kg)	Kerosene as fuel (kg)	Heavy oil as fuel (kg)	LPG(NPG) as fuel (kg)
Quantity		5.10E+01	1.79E-02	1.17E+01	2.16E+02	7.20E-01	6.56E-04	3.78E-03	5.85E-01
Note					Electricity consumption for 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years
Product	Classification	Consumption	Consumption	Process					
	Distribution	LNG as fuel (kg)	Electricity (kWh)	Incineration: Industrial waste (kg)					
Quantity		2.74E-01	1.83E+02	3.04E+00					
Note		Production of consumables used in 5 years	Production of consumables used in 5 years	Packaging materials for distribution of ingredient					

Note: At "Use Stage", the product electricity consumption in 5 years usage period is 216 kWh.

4.2 Disposition/Recycle information on consumables and replacement parts

Consumables	Classification	Consumption	Process	Process	Process
	Distribution	Diesel truck: 4 ton (kg.km)	Shredding (kg)	Incineration to landfill (as ash) (kg)	Landfill: General waste (kg)
Quantity		1.11E+04	1.15E+02	1.70E+02	5.22E+01
Note		Consumables not collected	Consumables not collected	Consumables not collected	Consumables not collected

Note

5. Disposition/Recycle stage information (per product): process method and scenarios

Scenario	Classification	Consumption	Process	Process	Process
	Distribution	Diesel truck: 4 ton (kg.km)	Shredding (kg)	Incineration to landfill (as ash) (kg)	Landfill: General waste (kg)
Quantity		6.92E+02	5.75E+00	4.90E+00	2.25E+00
Note		Machines not collected	Machines not collected	Machines not collected	Machines not collected

Note

6. Others