Form 1（F-01s-02）

Product Environmental Aspects Declaration

EP and IJ printer (PCR number: AD-04)

No. AD-17-E964
Date of publication
Dec./28/2017

brother at your side

http://www.brother.co.jp/

For inquiry:
Environmental Product Group
Production Innovation Dept.
Production & Engineering Center
Brother Industries, Ltd.
Tel: +81-52-824-2511
（Representative）

Black & White Laser Printer HL-L2370DWXL
Specifications:
- **Electrophotographic Printer (EP)**
- **Black & White**
- **Printing Speed: 34ppm (A4)**
- **Maximum Printing Size: Legal**
- **Flexible Wireless & Wired Interfaces**
- **Duplex Printing**

The following data is calculated by assuming the product prints 693,600 sheets in 5-year usage period.
< Main environmental impact in the product lifecycle >

・ Energy consumption	20,900MJ
・ Global warming impact (CO_2 equivalent)	1,241.3kg
・ Acidification impact (SO_2 equivalent)	1.97kg
・ Mineral resources(Iron ore equivalent)	309kg
・ Energy resources(crude oil equivalent)	349kg

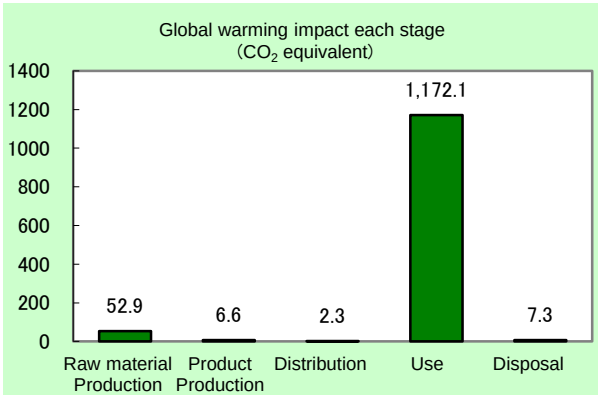

・Electric power consumption in 5 years of “Use stage” is 324kWh.
・The above data does not include the environmental impact of the paper that is used for printing.

Notes:

1. Original LCA data is available on PEIDS: Product Environmental Information Declaration Sheet, and Product Data Sheet.
2. Unified rules and requirements for EcoLeaf LCA, for intended product category, are available as a PCR:Product Category Rule. Visit EcoLeaf website under JEMAI homepage at http://www.ecoleaf-jemai.jp/eng/ for details.
3. Basic Units used for calculations are based on Japan domestic data at this time, due to a lack of base data to establish localized Basic Unit for overseas locations adequately.
4. This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.

[Supplemental environmental information]

The product assembly and main parts of toner and photoreceptor are produced at plants certified with ISO 14001.
The product conforms to the International Energy Star Program.

PCR review was conducted by: PCR Deliberation Committee, January 01, 2008, Name of representative: Yohji Uchiyama, University of Tsukuba, Graduate School
Independent verification of the label and data, according to ISO 14025 ☐ internal ■ external Third party verifier *: System auditor, Yasuo Koseki

Program operator: Japan Environmental Management Association for Industry Email: ecoleaf@jemai.or.jp

* In the case of a business entity certified as an Ecoleaf-data-collection system, the names of certification auditors are written.

The EcoLeaf is an environmental labeling program that belongs to the ISO-Type Ⅲ category.

Form 2-A(F-02As-02)

Product Environmental Information Data Sheet (PEIDS)

Document control no.	F-02As-02
Product vendor	Brother Industries,LTD.
EcoLeaf registration no.	AD-17-E964

Unit Function DB version	v2.1
Characterization Factor DB version	v2.1

PCR name	EP(Electrophotographic Printer) and IJ(Ink Jet) printer		Product type	HL-L2370DWXL			
PCR code	AD-04	Product weight (kg)	7.74	Package (kg)	1.54	Weight total (kg)	9.28

In/Out items \ Life Cycle Stage					Unit	Production		Distribution	Use	Disposition	Total
						Raw material	Product				
Energy Consumption					MJ	1.02E+03	1.27E+02	3.05E+01	1.98E+04	8.14E+00	2.09E+04
					Mcal	2.43E+02	3.04E+01	7.28E+00	4.72E+03	1.94E+00	5.00E+03
Inventory anaiyses	Impact by Resource Consumption	Exhaustible resources	Energy resources	Coal	kg	5.14E+00	7.91E-01	7.11E-05	9.59E+01	4.90E-02	1.02E+02
				Crude oil (for fuel)	kg	1.00E+01	1.01E+00	6.65E-01	1.88E+02	8.69E-02	2.00E+02
				LNG	kg	2.17E+00	3.98E-01	1.03E-02	3.93E+01	2.52E-02	4.19E+01
				Uranium content of an ore	kg	2.07E-04	5.36E-05	4.82E-09	3.82E-03	3.31E-06	4.08E-03
			Mineral resources	Crude oil (for material)	kg	4.71E+00	0	0	7.28E+01	0	7.75E+01
				Iron content of an ore	kg	2.33E+00	0	0	3.84E+01	0	4.08E+01
				Cu content of an ore	kg	1.42E-01	0	0	1.52E-01	0	2.94E-01
				Al content of an ore	kg	1.08E-01	0	0	3.12E+00	0	3.23E+00
				Ni content of an ore	kg	7.84E-03	0	0	1.84E-01	0	1.91E-01
				C content of an ore	kg	1.13E-02	0	0	2.62E-01	0	2.73E-01
				Mn content of an ore	kg	1.20E-02	0	0	2.31E-01	0	2.43E-01
				Pb content of an ore	kg	6.94E-03	0	0	5.28E-03	0	1.22E-02
				Sn content of an ore	kg	-	-	-	-	-	
				Zn content of an ore	kg	6.83E-02	0	0	5.20E-02	0	1.20E-01
				Au content of an ore	kg	-	-	-	-	-	
				Ag content of an ore	kg	-	-	-	-	-	
				Silica Sand	kg	2.10E-01	0	0	8.44E-01	0	1.05E+00
				Halite	kg	6.57E-01	5.06E-05	0	6.15E+00	2.64E-03	6.81E+00
				Limestone	kg	6.29E-01	3.28E-03	0	1.08E+01	6.78E-02	1.15E+01
				Natural soda ash	kg	1.82E-02	0	0	4.35E-02	0	6.17E-02
			Biomass resources	Wood	kg	2.76E+00	9.01E-02	0	1.88E+02	0	1.91E+02
				Water	kg	5.42E+03	6.04E+02	5.38E-02	7.68E+04	4.15E+01	8.29E+04
	Impact by Emission/Discharge to the environment	to Atmosphere		CO2	kg	5.16E+01	6.58E+00	2.16E+00	1.15E+03	7.30E+00	1.22E+03
				Sox	kg	3.35E-02	4.85E-03	1.24E-03	7.31E-01	3.83E-03	7.75E-01
				Nox	kg	6.74E-02	4.50E-03	8.96E-03	1.61E+00	8.19E-03	1.70E+00
				N2O	kg	4.80E-03	1.45E-04	3.82E-04	6.77E-02	1.08E-05	7.31E-02
				CH4	kg	5.51E-04	1.43E-04	1.29E-08	1.01E-02	8.87E-06	1.08E-02
				CO	kg	6.53E-03	9.62E-04	2.08E-03	2.43E-01	1.50E-03	2.54E-01
				NMVOC	kg	1.08E-03	2.80E-04	2.52E-08	1.99E-02	1.74E-05	2.12E-02
				CxHy	kg	2.23E-03	4.66E-05	2.88E-04	3.50E-02	2.85E-05	3.76E-02
				Dust	kg	7.01E-03	2.62E-04	8.88E-04	1.27E-01	4.67E-04	1.35E-01
		to Water system	to Water domain	BOD	kg	-	-	-	-	-	
				COD	kg	-	-	-	-	-	
				N total	kg	-	-	-	-	-	
				P total	kg	-	-	-	-	-	
				SS	kg	-	-	-	-	-	
		to Soil system		Unspecified Solid Waste	kg	4.09E-01	9.36E-04	0	7.49E+01	3.30E+00	7.86E+01
				Slag	kg	8.41E-01	0	0	1.18E+01	0	1.26E+01
				Sludge	kg	1.77E-01	0	0	6.62E+00	0	6.79E+00
				Low level radio-active waste	kg	1.45E-04	3.74E-05	3.37E-09	2.66E-03	2.31E-06	2.85E-03
Impact assessment	by Res			Energy resources (crude oil equivalent)	kg	1.76E+01	2.43E+00	6.78E-01	3.28E+02	1.76E-01	3.49E+02
				Mineral resources (Iron ore equivalent)	kg	4.37E+01	0	0	2.65E+02	0	3.09E+02
	by Emission/Discharge to the environment	to Atmosphere		Global Warming (CO2 equivalent)	kg	5.29E+01	6.62E+00	2.27E+00	1.17E+03	7.31E+00	1.24E+03
				Acidification (SO2 equivalent)	kg	8.07E-02	7.99E-03	7.51E-03	1.86E+00	9.57E-03	1.97E+00
				Ozone Depletion (CFC-11 equivalent)	kg	-	-	-	-	-	
				Photochemical Oxidant	kg	4.21E-03	2.44E-04	4.78E-04	7.42E-02	2.12E-04	7.94E-02
				Eutrophication (Phosphate equivalent)	kg	-	-	-	-	-	

[Notes for readers: EcoLeaf common rules]

I. Stage related

A. "Production" stage is intended for two sub-stages listed below.
(1) "Raw material" production: consists of mining, transportation and raw material production.
(2) "Product" production: consists of the parts processing, assembly and installation.

B. "Distribution" stage is intended for transportation of produced product. Transportation of consumables and maintenance goods (e.g. replacement parts) for use of the product are included into "Use" stage.

C. "Use" stage is intended for use of the product (active mode, standby mode, etc.) and production, transportation to disposal of consumables/maintenance goods (e.g. replacement parts).

D. "Disposition" stage is intended for environmental impacts by product disposition.

II. Inventory analyses

A. Data of mineral ore on "Exhaustible resources" are presented in weight of pure ingredients (e.g. iron, aluminum) in the ore.

B. Data on energy resources are presented based on origin in calorific value. e.g. Data on uranium ore presents weight of uranium concentrate, which is available for use as an atomic fuel.

C. Data of discharge to water system are in actual figure (not calculated using unit function in inventory analyses).

III Impact analyses

Result of the "Impact analyses" is found in converting results of inventory analyses into total amount of a reference material (e.g. CO_2 in case of "Global Warming").

A. Impact "by resource consumption" represents magnitude of impacts to resource depletion.

B. Impact "by emission/discharge to environment" represents magnitude of impacts to Atmosphere, Water and Soil system.

IV Data entry format

A. Exponential notation, after the decimal point to two, should be used.

B. Indicate "0" instead exponential notation, if the result of calculation or estimation is considered as "zero" or negligible in comparison to related results.

C. Indicate " — " if calculation nor estimation can not be done, in order to differentiate to indicate "zero".

D. Row total of the data is automatically calculated, excluding a row includes " — " item. Row total of such is presented as a blank (no data).
(BGD for material production are for production from mineral ore. Those data do not include reclaiming processes like recovery from scrap.)

[Notes for readers: Target product specific]

1. Product weight includes the accessories as standard equipment, a toner cartridge and a drum unit. Packaging weight includes packaging material and appended goods (e.g., user's manual, other printed matter, polyethylene bags).
2. Production stage includes the production/distribution impact of the parts making up a machine and the initial set of a toner cartridge and a photo conductor, as well as the impact of product assembly.
3. Distribution stage's impact is calculated according to the PCR. The transportation distance of a product from an overseas factory to the port of Japan is based on actual distance.
The transportation distance in Japan uses 100 kmas average distance
4. Use stage's impact is calculated according to the PCR. It includes the impact of printing 693,600 sheets, calculated by supposing a user use a machine for 5 years.
It also includes the electricity consumption of a machine calculated based on 5-year use, supposing a month consists of 4 weeks, with weekly electricity consumption calculated by the TEC test procedure.
The production, distribution, and disposal/recycle impact of the consumables used in those 5 years is also included.
The distribution impact of consumables is calculated under the same condition of products:
The transportation distance of consumables from an overseas factory to the port of Japan is based on actual distance. The transportation distance in Japan uses 100 km as average distance.
Since we have not collected consumables as a producer, which are newly introduced, they are assumed to be collected as general waste, crushed and separated as combustible/non-combustible material.
This stage includes the incineration impact of combustible materials and the landfill impact of non-combustible materials of consumables.
5. Disposal stage: Since we have not collected machines as a producer, they are assumed to be collected as general waste, crushed and separated as combustible/non-combustible material.
This stage includes the incineration impact of combustible materials and the landfill impact of non-combustible materials of machines.
6. Others: This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.

Form 3(F-03s-02)

Product data sheet

(Input data and parameters for LCA)

Document control no.	F-03s-02
Product vendor	Brother Industries,LTD.
EcoLEaf registration no.	AD-17-E964

PCR name	EP and IJ printer(PCR ID:AD-04)	Product type	HL-L2370DWXL				
LCA/LCIA in units of:	1	Product weight (kg)	7.74	Package (kg)	1.54	Weight total (kg)	9.28

1. Product information (per unit): parts etc. by material and by process/assembly method

	Breakdown of primary materials				Math breakdown of parts, which need to apply Processing / Assembly Base Units (Parts B, C)			
	Material name	Weight (kg)	Material name	Weight (kg)	Process name	Weight (kg)	Process name	Weight (kg)
Product	Steel	1.93E+00	Paper	1.29E+00	Press molding:Iron (kg)	1.98E+00	Parts assembly (kg)	1.28E+00
	Stainless steel	4.93E-02	Semiconductor substrate	6.19E-01	Press molding:Nonferrous metal (kg)	3.49E-02		
	Aluminum	7.80E-02	Wood	0	Injection molding (kg)	4.78E+00		
	Other metal	0	Medium-sized motor	2.87E-01	Glass molding (kg)	3.35E-02		
	Thermoplastic resin	4.75E+00	Lubricants	1.63E-03				
	Thermosetting resin	1.44E-02						
	Rubber	2.20E-01						
	Glass	3.35E-02						
	Subtotal	7.08E+00	Subtotal	2.20E+00				
	Total			9.28E+00	Subtotal	6.83E+00	Subtotal	1.28E+00

Note

2. Production site information (per unit): Consumption and discharge/emission for production/processing/assembly within the site.

SOx and NOx should be indicated in SO_2, NO_2 equivalent.

Consumption	Classification	Material	Energy	Energy	Energy	Energy	Material	Energy	Energy
	Distribution	Corrugated cardboard (kg)	Electricity (kWh)	Diesel truck:10 ton (kg･km)	Diesel oil as fuel (kg)	Freight by ship (kg･km)	Raw wood(Imported) (kg)	Furnace LPG (kg)	Diesel truck:20 ton (kg･km)
	Quantity	3.50E-02	6.78E+00	1.30E+01	1.02E-02	3.98E+03	1.56E-02	1.95E-02	2.55E+01
	Note								
	Classification	Energy							
	Distribution	Incineration: Industrial waste (kg)							
	Quantity	5.06E-02							
	Note								
Emission/Discharge	Classification								
	Distribution								
	Quantity								
	Note								

Note

3. Distribution stage information (per unit): means, distance, loading ratio, consumptions and emissions/discharges.

Distribution	Means of transportation	Diesel truck:20 ton (kg･km)	Diesel truck:20 ton (kg･km)	Diesel truck:20 ton (kg･km)	Diesel truck:20 ton (kg･km)	Freight by ship (kg･km)	Freight by ship (kg･km)	Freight by ship (kg･km)	Freight by ship (kg･km)
	Conditions	Mass(kg)	Distance （km)	Loading Ratio(%w)	Load(kg･km)	Mass(kg)	Distance （km)	Loading Ratio(%w)	Load(kg･km)
	Quantity	9.34E+00	7.00E+01	3.57E+01	1.83E+03	9.34E+00	3.80E+03	1.00E+02	3.55E+04
	Note								
	Means of transportation	Diesel truck:10 ton (kg･km)	Diesel truck:10 ton (kg･km)	Diesel truck:10 ton (kg･km)	Diesel truck:10 ton (kg･km)				
	Conditions	Mass(kg)	Distance （km)	Loading Ratio(%w)	Load(kg･km)				
	Quantity	9.34E+00	1.00E+02	3.56E+01	2.63E+03				
	Note								

Note

4. Use stage (per unit): use condition (mode, term) including active mode, standby mode and maintenance.

4.1 Product and accessories subject to this analysis

Product	Classificatior	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Electricity (kwh)	Diesel truck: 20 ton (kg.km)	Freight by ship (kg.km)	Diesel truck: 10 ton (kg.km)	Cold-Rolled steel plate (kg)	Electroplated steel Plate (kg)	Stainless steel plate (kg)	Glass (kg)
	Quantity	3.24E+02	6.97E+04	8.00E+05	9.97E+04	1.56E-01	3.61E+01	1.16E+00	3.79E-01
	Note	Electricity consumption for 5 years	Distribution of consumables used in 5 years	Distribution of consumables used in 5 years	Distribution of consumables used in 5 years				
	Classificatior	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Aluminum plate (kg)	PC-ABS(70/30)(kg)	High density polyethylene (kg)	Low density polyethylene (kg)	PP (kg)	PA66 (Polyamide 66) (kg)	MMA resin (kg)	PS (kg)
	Quantity	2.92E+00	1.11E-02	4.99E-02	2.23E+00	8.71E+00	6.24E-02	1.82E-03	3.02E+01
	Note								
	Classificatior	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	ABS (kg)	PBT(Poly Butylene Terephtalate) (kg)	Polycarbonate (kg)	POM(polyacetal) (kg)	PET (kg)	Nitrile-butadiene rubber (NBR) (kg)	Expandable soft polyurethane (for automobile) (kg)	Medium-sized motor (kg)
	Quantity	5.01E+00	3.30E-01	2.59E+00	3.67E+00	2.43E+01	5.99E+00	9.23E-01	4.38E-01
	Note								
	Classificatior	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Assembled circuit board(kg)	Paper (Western style)	Corrugated cardboard (kg)	Injection molding (kg)	Press molding: Iron (kg)	Press molding: Nonferrous metal (kg)	Glass molding (kg)	Parts assembly (kg)
	Quantity	4.71E-01	1.39E+00	8.37E+01	6.52E+01	3.74E+01	4.58E-01	3.79E-01	2.63E+01
	Note								
	Classificatior	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Electricity (kwh)	Diesel oil as fuel (kg)	LPG(NPG) as fuel (kg)	Diesel truck: 10 ton (kg.km)	Diesel truck: 20 ton (kg.km)	Freight by ship (kg.km)	Corrugated cardboard (kg)	Raw wood (foreign) (kg)
	Quantity	3.22E+02	3.48E-01	6.63E-01	7.42E+02	2.29E+03	3.55E+05	2.68E+00	1.20E+00
	Note	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years	Production of consumables used in 5 years
	Classificatior	Process							
	Distribution	Incineration: Industrial waste (kg)							
	Quantity	3.88E+00							
	Note	Production of consumables used in 5 years							

Note Electric power consumption in 5 years of "Use stage" is 324kWh.

4.2 Disposition/Recycle information on consumables and replacement parts

Consumables	Classification	Process	Process	Incineration to landfill (as ash) (kg)	Process				
	Distribution	Diesel truck: 4 ton (kg.km)	Shredding (kg)	Incineration to landfill	Landfill: General waste (kg)				
	Quantity	2.06E+04	1.14E+02	1.70E+02	4.21E+01				
	Note	Consumables not collected	Consumables not collected	Consumables not collected	Consumables not collected				

Note

5. Disposition/Recycle stage information (per product): process method and scenarios

Scenario	Classification	Process	Process	Process	Process				
	Distribution	Diesel truck:4 ton (kg･km)	Shredding (kg)	Incineration to landfill(as ash) (kg)	Landfill:General waste (kg)				
	Quantity	7.56E+02	6.28E+00	5.34E+00	2.47E+00				
	Note	Machines not collected	Machines not collected	Machines not collected	Machines not collected				

Note

6. Others